


3-JAW WEDGE TYPE NON THROUGH-HOLE WATERPROOF POWER CHUCK (WITH ADAPTOR)

- 防水夾頭適用於立式與臥式CNC車床。
- Waterproof power chuck is suitable for vertical and horizontal CNC lathe.

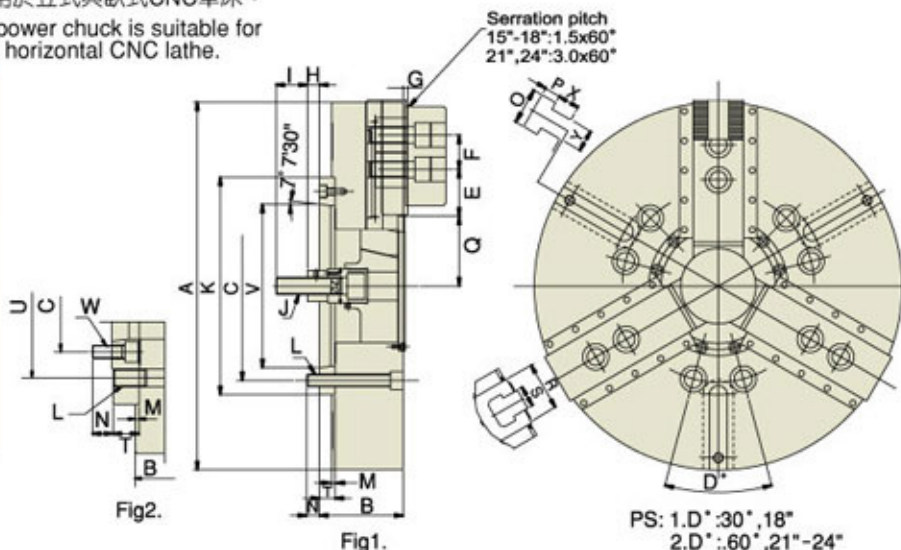

規格 SPECIFICATIONS

| 尺寸 Dim | 型式 model | 爪行程(直徑) Jaw Stroke (Dia) (mm) | 柱塞行程 Plunger Stroke (mm) | 最大推力 Max. Pull (kgf) | 最大夾持力 /油壓壓力 Max. Gripping Force (kgf)/(kgf/cm ²) | 最高轉速 Max. Speed (r.p.m) | 重量 Weight (kg) | 慣性矩 Moment of Inertia (kgf.m ²) | 適合油壓缸 Matching Cylinder | 適合之軟爪 Matching Soft Jaw | 適合之硬爪 Matching Hard Jaw |
|-----------|-------------|-------------------------------------|--------------------------------|----------------------------|---|-------------------------------|----------------------|--|-------------------------------|-------------------------------|-------------------------------|
| | VW-218A8 | 16 | 35 | 8362 | 25391/32.6 | 2700 | 134 | 2.41 | MS-200 | HC-15-1 | HJ-15-1 |
| | VW-218A11 | 16 | 35 | 8362 | 25391/32.6 | 2700 | 123 | 2.11 | MS-200 | HC-15-1 | HJ-15-1 |
| | VW-221A11 | 16 | 35 | 8362 | 25391/32.6 | 1900 | 193 | 5.1 | MS-200 | HC-21-1 | HJ-21-1 |
| | VW-221A15 | 16 | 35 | 8362 | 25391/32.6 | 1900 | 187 | 4.9 | MS-200 | HC-21-1 | HJ-21-1 |
| | VW-224A11 | 16 | 35 | 8362 | 25391/32.6 | 1750 | 239 | 7.5 | MS-200 | HC-21-1 | HJ-21-1 |
| | VW-224A15 | 16 | 35 | 8362 | 25391/32.6 | 1750 | 233 | 7.1 | MS-200 | HC-21-1 | HJ-21-1 |

尺寸表 DIMENSIONS

| 尺寸 Dim | 型式 model | VW-218A8 | VW-218A11 | VW-221A11 | VW-221A15 | VW-224A11 | VW-224A15 |
|------------------|-------------|----------|-----------|-----------|-----------|-----------|-----------|
| A | | 450 | 450 | 530 | 530 | 610 | 610 |
| B | | 141 | 130 | 146 | 146 | 146 | 146 |
| C | | 171.45 | 235 | 235 | 330.2 | 235 | 330.2 |
| F | | 43 | 43 | 60 | 60 | 60 | 60 |
| K | | 300 | 300 | 380 | 380 | 380 | 380 |
| L | | 6-M16 | 6-M20 | 6-M20 | 6-M24 | 6-M20 | 6-M24 |
| M | | 6 | 6 | 6 | 6 | 6 | 6 |
| N | | 24 | 22 | 24 | 34 | 28 | 34 |
| T | | 33 | 22 | 27 | 27 | 27 | 27 |
| V | | 139.719 | 196.869 | 196.869 | 285.75 | 196.869 | 285.75 |
| U | | 171.45 | 235 | 235 | 330.2 | 235 | 330.2 |
| E | Max. | 50.25 | 50.25 | 93.5 | 93.5 | 93.5 | 93.5 |
| | Min. | 23.25 | 23.25 | 24.5 | 24.5 | 24.5 | 24.5 |
| G | | 3 | 3 | 3 | 3 | 3 | 3 |
| H | Max. | 71 | 78 | 56 | 56 | 56 | 56 |
| | Min. | 36 | 43 | 21 | 21 | 21 | 21 |
| I | | 55 | 55 | 55 | 55 | 55 | 55 |
| J | | M30X3.5 | M30X3.5 | M30X3.5 | M30X3.5 | M30X3.5 | M30X3.5 |
| Q | Max. | 108 | 108 | 86 | 86 | 125 | 125 |
| | Min. | 100 | 100 | 78 | 78 | 117 | 117 |
| R | | 62 | 62 | 62 | 62 | 62 | 62 |
| S | | 25.5 | 25.5 | 25 | 25 | 25 | 25 |
| W | | 6-M16 | - | 6-M20 | - | 6-M20 | - |
| X | | 16 | 16 | 16 | 16 | 16 | 16 |
| Y | | 22 | 22 | 22 | 22 | 22 | 22 |
| P | | 22 | 22 | 22 | 22 | 22 | 22 |
| O | | 37 | 37 | 37 | 37 | 37 | 37 |
| Z | | 60 | 60 | 60 | 60 | 60 | 60 |
| 參考圖 Reference | | Fig. 2 | Fig. 1 | Fig. 2 | Fig. 1 | Fig. 2 | Fig. 1 |